



FACTORY LOCATION

No.11-1, Yanfeng Road, Huishan Economic Zone,
Wuxi, Jiangsu Province,
China

OFFICE HEADQUARTER

Rm No.516, Bld No.4, Tiantang E Gu, Xinwen Rd 33,
Hangzhou, Zhejiang Province, China
Ph: +86 571 8742 2726
Mb: +86 135 888 20387
Email: info@riyang-welding.com
www.riyangfusion.com, www.riyang-welding.com

RIYANG
Hand Extruder



EN 2019

RYH1600A



Model	RYH1600A	
Voltage		220V, 50Hz/60Hz
Material		PE / PP
Extruding Motor Power	W	800
Hot Air Power	W	1600
Rod Heating Power	W	800
Air Temperature	°C	20-600 Adjustable
Extruding Temperature	°C	20-380 Adjustable
Extruding Volume	Kg/h	2
Rod Diameter	mm	φ3.0-4.0
Net Weight	Kg	6.5
Driving Motor		HITACHI

RYH1600C



Model	RYH1600C	
Voltage		220V, 50Hz/60Hz
Material		PE / PP
Extruding Motor Power	W	800
Hot Air Power	W	1600
Rod Heating Power	W	800
Air Temperature	°C	20-600 °C Adjustable
Extruding Temperature	°C	20-380 °C Adjustable
Extruding Volume	Kg/h	2.5
Rod Diameter	mm	φ3.0-4.0
Net Weight	Kg	7.0
Driving Motor		METABO

RYH3400A




Model	RYH3400A	
Voltage		220V, 50Hz/60Hz
Material		PE / PP
Extruding Motor Power	W	800
Hot Air Power	W	3400
Rod Heating Power	W	800
Air Temperature		20-600 °C Adjustable
Extruding Temperature		20-380 °C Adjustable
Extruding Volume	Kg/h	2
Rod Diameter	mm	φ3.0-4.0
Net Weight	Kg	6.5
Driving Motor		HITACHI

RYH3400C




Model	RYH3400C	
Voltage		220V, 50Hz/60Hz
Material		PE / PP
Extruding Motor Power	W	800
Hot Air Power	W	3400
Rod Heating Power	W	800
Air Temperature		20-600 °C Adjustable
Extruding Temperature		20-380 °C Adjustable
Extruding Volume	Kg/h	2.5
Rod Diameter	mm	φ3.0-4.0
Net Weight	Kg	7.0
Driving Motor		METABO

RYH1600B

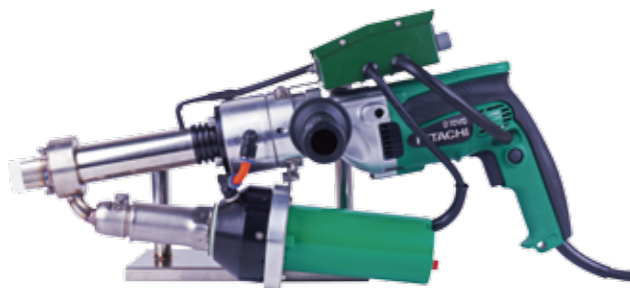

Model	RYH1600B	
Voltage		220V, 50Hz/60Hz
Material		PE / PP
Extruding Motor Power	W	800
Hot Air Power	W	1600
Rod Heating Power	W	800
Air Temperature		20-600 °C Adjustable
Extruding Temperature		20-380 °C Adjustable
Extruding Volume	Kg/h	2
Rod Diameter	mm	φ3.0-4.0
Net Weight	Kg	6.5
Driving Motor		HITACHI

RYH1600D

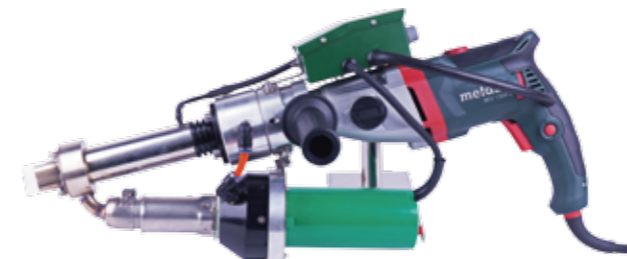

Model	RYH1600D	
Voltage		220V, 50Hz/60Hz
Material		PE / PP
Extruding Motor Power	W	800
Hot Air Power	W	1600
Rod Heating Power	W	800
Air Temperature		20-600 °C Adjustable
Extruding Temperature		20-380 °C Adjustable
Extruding Volume	Kg/h	2.5
Rod Diameter	mm	φ3.0-4.0
Net Weight	Kg	7.0
Driving Motor		METABO